




CAPS Polaris Vinyl

VCF Series Vinyl Caps with Flanges

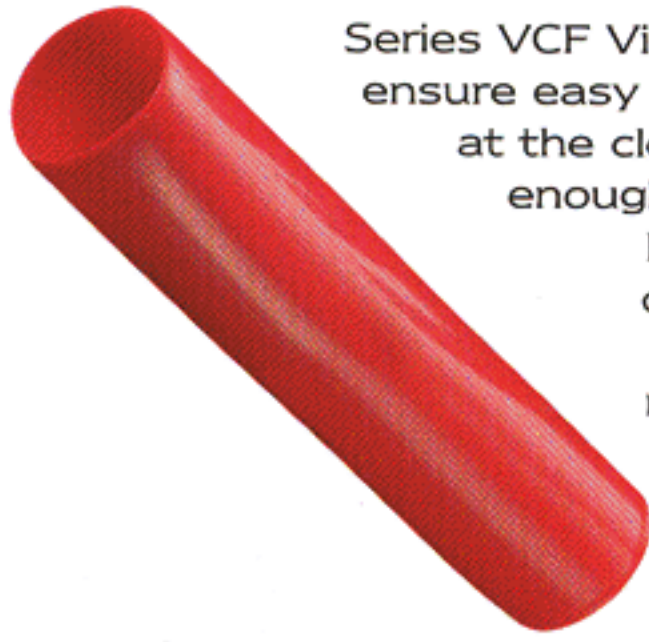


Series VCF Vinyl Caps with Flanges ensure easy removal with a flange at the closed end that is small enough not to interfere, but large enough to grasp during removal. These caps are available in most of the Series VC sizes, and come in 9 standard colors.

Note:

- VCF-125 has a maximum length of 1.5".
- VCF-140 through VCF-250 have a maximum length of 2".
- VCF-281 through VCF-3125 have various maximum lengths of up to 8". Call factory for details.



MATERIAL: Vinyl
COLORS*: White, Black, Brown, Orange, Red, Green, Grey, Blue, Yellow – Call factory for colors in stock
AVAILABILITY: Consult Factory
 (Not available in high temp material)

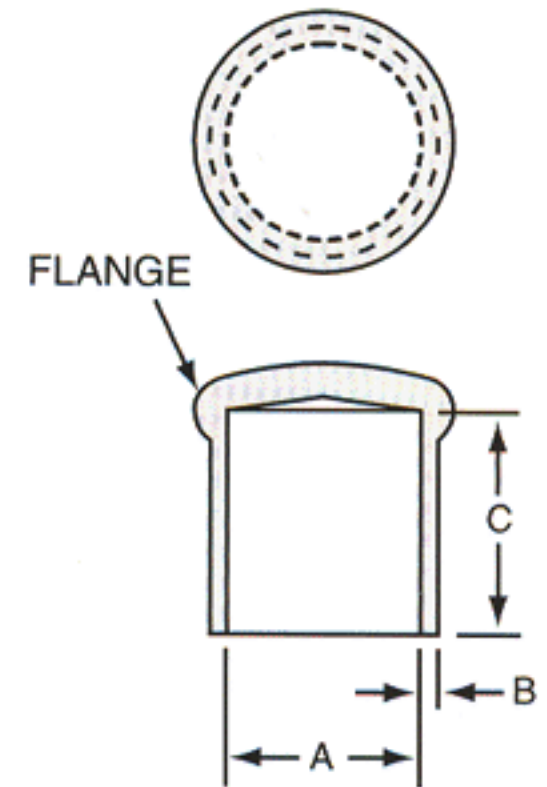

| Caplug No. | Dimensions | | | | | | Packaging | | | | Caplug No. |
|------------|------------|-------|-------|------|-------|------|------------------------------|------|---------------|-------------------|------------|
| | A | | B | | C | | Standard Carton | | No. of Pieces | Mini Pak Quantity | |
| | in | mm | in | mm | in | mm | Shipping Wt.(Approx.) lbs | kgs | | | |
| VCF-125-8 | 0.125 | 3.17 | 0.035 | 0.89 | .500 | 12.7 | 3 | 1.4 | 5000 | 1000 | VCF-125-8 |
| VCF-125-16 | 0.125 | 3.17 | 0.035 | 0.89 | 1.000 | 25.4 | 4 | 1.8 | 5000 | 1000 | VCF-125-16 |
| VCF-140-8 | 0.140 | 3.55 | 0.040 | 1.02 | .500 | 12.7 | 2 | 1.0 | 5000 | 1000 | VCF-140-8 |
| VCF-140-16 | 0.140 | 3.55 | 0.040 | 1.02 | 1.000 | 25.4 | 5 | 2.3 | 5000 | 1000 | VCF-140-16 |
| VCF-156-8 | 0.156 | 3.96 | 0.040 | 1.02 | .500 | 12.7 | 2 | 1.0 | 5000 | 1000 | VCF-156-8 |
| VCF-156-16 | 0.156 | 3.96 | 0.040 | 1.02 | 1.000 | 25.4 | 6 | 2.7 | 5000 | 1000 | VCF-156-16 |
| VCF-172-8 | 0.172 | 4.36 | 0.040 | 1.02 | .500 | 12.7 | 3 | 1.4 | 5000 | 1000 | VCF-172-8 |
| VCF-172-16 | 0.172 | 4.36 | 0.040 | 1.02 | 1.000 | 25.4 | 6 | 2.7 | 5000 | 1000 | VCF-172-16 |
| VCF-187-8 | 0.187 | 4.74 | 0.040 | 1.02 | .500 | 12.7 | 3 | 1.4 | 5000 | 1000 | VCF-187-8 |
| VCF-187-16 | 0.187 | 4.74 | 0.040 | 1.02 | 1.000 | 25.4 | 6 | 2.7 | 5000 | 1000 | VCF-187-16 |
| VCF-187-24 | 0.187 | 4.74 | 0.040 | 1.02 | 1.500 | 38.1 | 16 | 7.3 | 4000 | 800 | VCF-187-24 |
| VCF-203-8 | 0.203 | 5.15 | 0.045 | 1.14 | .500 | 12.7 | 4 | 1.8 | 5000 | 1000 | VCF-203-8 |
| VCF-203-16 | 0.203 | 5.15 | 0.045 | 1.14 | 1.000 | 25.4 | 8 | 3.6 | 5000 | 1000 | VCF-203-16 |
| VCF-218-8 | 0.218 | 5.53 | 0.045 | 1.14 | .500 | 12.7 | 5 | 2.3 | 5000 | 1000 | VCF-218-8 |
| VCF-218-16 | 0.218 | 5.53 | 0.045 | 1.14 | 1.000 | 25.4 | 9 | 4.1 | 5000 | 1000 | VCF-218-16 |
| VCF-234-8 | 0.234 | 5.94 | 0.045 | 1.14 | .500 | 12.7 | 5 | 2.3 | 5000 | 1000 | VCF-234-8 |
| VCF-234-16 | 0.234 | 5.94 | 0.045 | 1.14 | 1.000 | 25.4 | 10 | 4.5 | 5000 | 1000 | VCF-234-16 |
| VCF-250-8 | 0.250 | 6.35 | 0.050 | 1.27 | .500 | 12.7 | 6 | 2.7 | 5000 | 1000 | VCF-250-8 |
| VCF-250-16 | 0.250 | 6.35 | 0.050 | 1.27 | 1.000 | 25.4 | 15 | 6.8 | 5000 | 1000 | VCF-250-16 |
| VCF-281-8 | 0.281 | 7.13 | 0.050 | 1.27 | .500 | 12.7 | 6 | 2.7 | 5000 | 1000 | VCF-281-8 |
| VCF-281-16 | 0.281 | 7.13 | 0.050 | 1.27 | 1.000 | 25.4 | 15 | 6.8 | 5000 | 1000 | VCF-281-16 |
| VCF-281-24 | 0.281 | 7.13 | 0.050 | 1.27 | 1.500 | 38.1 | 9 | 4.1 | 2500 | 500 | VCF-281-24 |
| VCF-312-8 | 0.312 | 7.92 | 0.055 | 1.40 | .500 | 12.7 | 7 | 3.2 | 5000 | 1000 | VCF-312-8 |
| VCF-312-16 | 0.312 | 7.92 | 0.055 | 1.40 | 1.000 | 25.4 | 21 | 9.5 | 5000 | 1000 | VCF-312-16 |
| VCF-312-24 | 0.312 | 7.92 | 0.055 | 1.40 | 1.500 | 38.1 | 24 | 10.9 | 5000 | 1000 | VCF-312-24 |
| VCF-343-8 | 0.343 | 8.71 | 0.055 | 1.40 | .500 | 12.7 | 9 | 4.1 | 5000 | 1000 | VCF-343-8 |
| VCF-343-16 | 0.343 | 8.71 | 0.055 | 1.40 | 1.000 | 25.4 | 8 | 3.6 | 2500 | 500 | VCF-343-16 |
| VCF-375-8 | 0.375 | 9.52 | 0.060 | 1.52 | .500 | 12.7 | 9 | 4.1 | 5000 | 1000 | VCF-375-8 |
| VCF-375-16 | 0.375 | 9.52 | 0.060 | 1.52 | 1.000 | 25.4 | 13 | 5.9 | 2500 | 500 | VCF-375-16 |
| VCF-406-8 | 0.406 | 10.31 | 0.060 | 1.52 | .500 | 12.7 | 10 | 4.5 | 5000 | 1000 | VCF-406-8 |
| VCF-406-16 | 0.406 | 10.31 | 0.060 | 1.52 | 1.000 | 25.4 | 9 | 4.1 | 2500 | 500 | VCF-406-16 |
| VCF-437-8 | 0.437 | 11.09 | 0.060 | 1.52 | .500 | 12.7 | 11 | 5.0 | 5000 | 1000 | VCF-437-8 |



VCF Series

| Dimensions | | | | | | Packaging | | | | Caplug No. |
|------------|-------|-------|------|-------|------|------------------------|------|-------------------|------|---------------|
| | | | | | | Standard Carton | | Mini Pak Quantity | | |
| A | | B | | C | | Shipping Wt. (Approx.) | | | | No. of Pieces |
| in | mm | in | mm | in | mm | lbs | kgs | | | |
| 0.437 | 11.09 | 0.060 | 1.52 | 1.000 | 25.4 | 13 | 5.9 | 2500 | 500 | VCF-437-16 |
| 0.500 | 12.70 | 0.060 | 1.52 | .500 | 12.7 | 12 | 5.4 | 5000 | 1000 | VCF-500-8 |
| 0.500 | 12.70 | 0.060 | 1.52 | 1.000 | 25.4 | 17 | 7.7 | 2500 | 500 | VCF-500-16 |
| 0.531 | 13.48 | 0.060 | 1.52 | .500 | 12.7 | 14 | 6.4 | 5000 | 1000 | VCF-531-8 |
| 0.531 | 13.48 | 0.060 | 1.52 | 1.000 | 25.4 | 13 | 5.9 | 2500 | 500 | VCF-531-16 |
| 0.562 | 14.27 | 0.065 | 1.65 | .500 | 12.7 | 9 | 4.1 | 2500 | 500 | VCF-562-8 |
| 0.562 | 14.27 | 0.065 | 1.65 | 1.000 | 25.4 | 15 | 6.8 | 2500 | 500 | VCF-562-16 |
| 0.625 | 15.87 | 0.065 | 1.65 | .500 | 12.7 | 10 | 4.5 | 2500 | 500 | VCF-625-8 |
| 0.625 | 15.87 | 0.065 | 1.65 | 1.000 | 25.4 | 17 | 7.7 | 2500 | 500 | VCF-625-16 |
| 0.625 | 15.87 | 0.065 | 1.65 | 1.500 | 38.1 | 20 | 9.1 | 2000 | 400 | VCF-625-24 |
| 0.687 | 17.44 | 0.065 | 1.65 | .500 | 12.7 | 11 | 5.0 | 2500 | 500 | VCF-687-8 |
| 0.687 | 17.44 | 0.065 | 1.65 | 1.000 | 25.4 | 8 | 3.6 | 1000 | 200 | VCF-687-16 |
| 0.750 | 19.05 | 0.065 | 1.65 | .500 | 12.7 | 13 | 5.9 | 2500 | 500 | VCF-750-8 |
| 0.750 | 19.05 | 0.065 | 1.65 | 1.000 | 25.4 | 9 | 4.1 | 1000 | 200 | VCF-750-16 |
| 0.812 | 20.62 | 0.065 | 1.65 | .500 | 12.7 | 14 | 6.4 | 2500 | 500 | VCF-812-8 |
| 0.812 | 20.62 | 0.065 | 1.65 | 1.000 | 25.4 | 10 | 4.5 | 1000 | 200 | VCF-812-16 |
| 0.812 | 20.62 | 0.065 | 1.65 | 1.500 | 38.1 | 16 | 7.3 | 1000 | 200 | VCF-812-24 |
| 0.875 | 22.22 | 0.065 | 1.65 | .500 | 12.7 | 14 | 6.4 | 2500 | 500 | VCF-875-8 |
| 0.875 | 22.22 | 0.065 | 1.65 | 1.000 | 25.4 | 10 | 4.5 | 1000 | 200 | VCF-875-16 |
| 0.875 | 22.22 | 0.065 | 1.65 | 1.500 | 38.1 | 14 | 6.4 | 1000 | 200 | VCF-875-24 |
| 0.937 | 23.79 | 0.070 | 1.79 | .500 | 12.7 | 18 | 8.2 | 2500 | 500 | VCF-937-8 |
| 0.937 | 23.79 | 0.070 | 1.79 | 1.000 | 25.4 | 11 | 5.0 | 1000 | 200 | VCF-937-16 |
| 1.000 | 25.40 | 0.070 | 1.79 | .500 | 12.7 | 7 | 3.2 | 1000 | 200 | VCF-1000-8 |
| 1.000 | 25.40 | 0.070 | 1.79 | 1.000 | 25.1 | 13 | 5.9 | 1000 | 200 | VCF-1000-16 |
| 1.000 | 25.40 | 0.070 | 1.79 | 1.500 | 38.1 | 19 | 8.6 | 1000 | 200 | VCF-1000-24 |
| 1.000 | 25.40 | 0.070 | 1.79 | 2.000 | 50.8 | 12 | 5.4 | 600 | 120 | VCF-1000-32 |
| 1.062 | 26.97 | 0.070 | 1.79 | 1.000 | 25.4 | 19 | 8.6 | 1200 | 240 | VCF-1062-16 |
| 1.062 | 26.97 | 0.070 | 1.79 | 1.500 | 38.1 | 14 | 6.4 | 600 | 120 | VCF-1062-24 |
| 1.125 | 28.57 | 0.070 | 1.79 | 1.000 | 25.4 | 22 | 10.0 | 1200 | 240 | VCF-1125-16 |
| 1.187 | 30.15 | 0.070 | 1.79 | 1.000 | 25.4 | 19 | 8.6 | 1000 | 200 | VCF-1187-16 |
| 1.250 | 31.75 | 0.070 | 1.79 | 1.000 | 25.4 | 18 | 8.2 | 1000 | 200 | VCF-1250-16 |
| 1.250 | 31.75 | 0.070 | 1.79 | 1.500 | 38.1 | 14 | 6.4 | 500 | 100 | VCF-1250-24 |
| 1.312 | 33.32 | 0.070 | 1.79 | 1.000 | 25.4 | 15 | 6.8 | 800 | 160 | VCF-1312-16 |
| 1.312 | 33.32 | 0.070 | 1.79 | 1.500 | 38.1 | 17 | 7.7 | 600 | 120 | VCF-1312-24 |
| 1.375 | 34.92 | 0.070 | 1.79 | 1.000 | 25.4 | 16 | 7.3 | 800 | 160 | VCF-1375-16 |
| 1.375 | 34.92 | 0.070 | 1.79 | 1.500 | 38.1 | 12 | 5.4 | 400 | 80 | VCF-1375-24 |
| 1.375 | 34.92 | 0.070 | 1.79 | 2.000 | 50.8 | 17 | 7.7 | 400 | 80 | VCF-1375-32 |
| 1.500 | 38.10 | 0.070 | 1.79 | 1.000 | 25.4 | 16 | 7.3 | 750 | 150 | VCF-1500-16 |
| 1.500 | 38.10 | 0.070 | 1.79 | 1.500 | 38.1 | 10 | 4.5 | 300 | 60 | VCF-1500-24 |
| 1.625 | 41.27 | 0.070 | 1.79 | 1.000 | 25.4 | 19 | 8.6 | 750 | 150 | VCF-1625-16 |
| 1.687 | 42.84 | 0.070 | 1.79 | 1.000 | 25.4 | 20 | 9.1 | 700 | 140 | VCF-1687-16 |
| 1.750 | 44.45 | 0.070 | 1.79 | 1.000 | 25.4 | 21 | 9.5 | 700 | 140 | VCF-1750-16 |
| 1.875 | 47.62 | 0.070 | 1.79 | 1.000 | 25.4 | 20 | 9.1 | 600 | 120 | VCF-1875-16 |
| 2.000 | 50.80 | 0.070 | 1.79 | 1.000 | 25.4 | 21 | 9.5 | 600 | 120 | VCF-2000-16 |
| 2.000 | 50.80 | 0.070 | 1.79 | 1.500 | 38.1 | 16 | 7.3 | 300 | 60 | VCF-2000-24 |
| 2.250 | 57.15 | 0.070 | 1.79 | 1.000 | 25.4 | 16 | 7.3 | 500 | 100 | VCF-2250-16 |
| 2.250 | 57.15 | 0.070 | 1.79 | 1.500 | 38.1 | 16 | 7.3 | 300 | 60 | VCF-2250-24 |
| 2.500 | 63.50 | 0.070 | 1.79 | 1.000 | 25.4 | 16 | 7.3 | 400 | 80 | VCF-2500-16 |
| 2.500 | 63.50 | 0.070 | 1.79 | 1.500 | 38.1 | 15 | 6.8 | 250 | 50 | VCF-2500-24 |
| 3.000 | 76.20 | 0.070 | 1.79 | 1.000 | 25.4 | 15 | 6.8 | 250 | 50 | VCF-3000-16 |
| 3.000 | 76.20 | 0.070 | 1.79 | 1.500 | 38.1 | 25 | 11.3 | 250 | 50 | VCF-3000-24 |
| 3.125 | 79.37 | 0.070 | 1.79 | 1.000 | 25.4 | 18 | 8.2 | 250 | 50 | VCF-3125-16 |
| 3.125 | 79.37 | 0.070 | 1.79 | 1.500 | 38.1 | 28 | 12.7 | 300 | 60 | VCF-3125-24 |